


Rodoirs avec liant galvanique, exécution normale

*Hones with galvanic bond, normal execution*

Honahlen mit Galvanischebindung, normale Ausführung

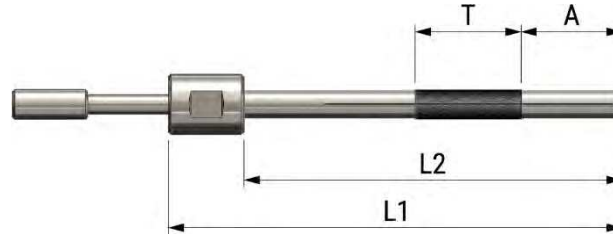

Ø	L1	L2	E	T	n	B	A	D	X	L <sub>max</sub>
1.50	45	35	---	8	---	---	10	15 - 50	0.1	21
1.60	45	35	---	8	---	---	10	15 - 50	0.1	21
1.70	45	35	---	8	---	---	10	15 - 50	0.1	21
1.80	45	35	---	8	---	---	10	15 - 50	0.1	21
1.90	45	35	---	8	---	---	10	15 - 50	0.1	21
2.00	60	50	---	14	---	---	14	15 - 70	0.1	29
2.50	60	50	---	14	---	---	14	15 - 70	0.1	29
3.00	65	55	---	16	---	---	15	15 - 120	0.2	32
3.50	65	55	---	16	---	---	15	15 - 120	0.2	32
4.00	65	55	---	16	---	---	15	15 - 120	0.2	32
4.50	65	55	---	16	---	---	15	15 - 120	0.2	32
5.00	85	70	---	21	---	---	20	15 - 150	0.2	39
6.00	90	75	---	21	---	---	20	15 - 150	0.2	44
7.00	90	75	---	21	---	---	20	15 - 150	0.2	44
8.00	100	85	---	21	---	---	25	15 - 150	0.2	49
9.00	100	85	---	21	---	---	25	15 - 150	0.2	49
10.00	105	90	---	21	---	---	25	15 - 150	0.2	54
10.89	105	90	---	21	---	---	25	15 - 150	0.2	54

Ø 1.50 - 10.89

