


Rodoirs avec liant galvanique, exécution normale

Hones with galvanic bond, normal execution

Honahlen mit Galvanischebindung, normale Ausführung

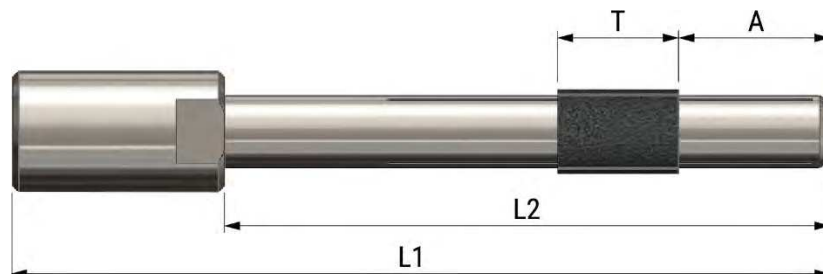

Ø	L1	L2	E	T	n	B	A	D	X	L _{max}
11.00	125	90	---	21	---	---	25	15 - 150	0.3	54
12.00	125	90	---	21	---	---	25	15 - 150	0.3	54
13.00	125	90	---	21	---	---	25	15 - 150	0.3	54
14.00	125	90	---	21	---	---	25	15 - 150	0.3	54
15.00	135	100	---	21	---	---	30	15 - 150	0.3	59
16.00	135	100	---	21	---	---	30	15 - 150	0.3	59
17.00	135	100	---	21	---	---	30	15 - 150	0.3	59
18.00	140	105	---	21	---	---	30	15 - 150	0.3	64
19.00	140	105	---	21	---	---	30	15 - 150	0.3	64
20.00	140	105	---	21	---	---	30	15 - 150	0.3	64
21.00	150	110	---	21	---	---	30	15 - 150	0.3	69
22.00	150	110	---	21	---	---	30	15 - 150	0.3	69
23.00	150	110	---	21	---	---	30	15 - 150	0.3	69
24.00	150	110	---	21	---	---	30	15 - 150	0.3	69
25.00	150	110	---	21	---	---	30	15 - 150	0.3	69