


Rodoirs avec liant galvanique, exécution longue
Hones with galvanic bond, long execution
 Honahlen mit Galvanischebindung, langer Ausführung

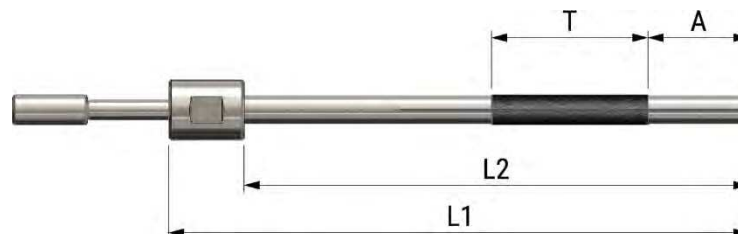

Ø	L1	L2	E	T	n	B	A	D	X	L _{max}
5.00	95	80	---	31	---	---	20	15 - 150	0.2	44
6.00	115	100	---	31	---	---	20	15 - 150	0.2	64
7.00	115	100	---	42	---	---	20	15 - 150	0.2	59
8.00	125	110	---	42	---	---	25	15 - 150	0.2	64
9.00	125	110	---	42	---	---	25	15 - 150	0.2	64
10.00	130	115	---	42	---	---	25	15 - 150	0.2	69
10.89	130	115	---	42	---	---	25	15 - 150	0.2	69

504L

Ø 5.00 - 10.89

