


Rodoirs avec liant métallique, uniquement pour la machine MVR 060  
*Hones with bronze bond, only for the MVR 060 machine*  
 Honahlen mit Bronzebindung, nur für die Maschine MVR 060

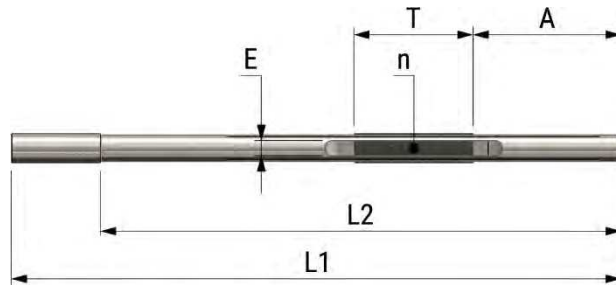

**MVR 060**

Ø	L1	L2	E	T	n	B	A	D	X	L <sub>max</sub>
2.00	41	35	1	8	3	---	10	7 - 250	0.1	21
2.10	41	35	1	8	3	---	10	7 - 250	0.1	21
2.20	41	35	1	8	3	---	10	7 - 250	0.1	21
2.30	41	35	1	8	3	---	10	7 - 250	0.1	21
2.40	41	35	1	8	3	---	10	7 - 250	0.1	21
2.50	41	35	1	8	3	---	10	7 - 250	0.1	21
2.60	41	35	1	8	3	---	10	7 - 250	0.1	21
2.70	41	35	1	8	3	---	10	7 - 250	0.1	21
2.80	41	35	1	8	3	---	10	7 - 250	0.1	21
2.90	41	35	1	8	3	---	10	7 - 250	0.1	21
2.95	41	35	1	8	3	---	10	7 - 250	0.1	21

Tige d'expansion / Expansion pins / Aufweitstifte



825-130      Ø 2.00 - 2.95      2%

