


Rodoirs avec liant galvanique, pour appareil 814 et machine MVR 060
Hones with galvanic bond, for apparatus 814 and machine MVR 060
 Honahlen mit Galvanischebindung, für Gerät 814 und Maschine MVR 060

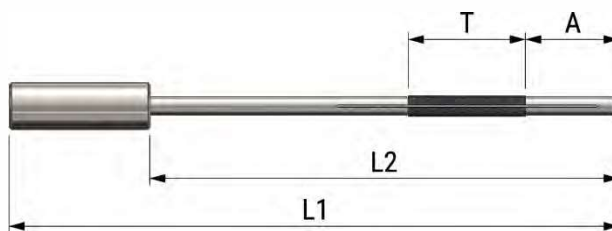

PEMAMO 814 / MVR 060

Ø	L1	L2	E	T	n	B	A	D	X	L _{max}
0.60	26	20	---	3	---	---	5	15-35	0.1	13
0.70	26	20	---	3	---	---	5	15-35	0.1	13
0.80	26	20	---	5	---	---	4	15-35	0.1	13
0.90	26	20	---	5	---	---	4	15-35	0.1	13
1.00	26	20	---	5	---	---	4	15-35	0.1	13
1.10	26	20	---	5	---	---	4	15-35	0.1	13
1.20	26	20	---	5	---	---	4	15-35	0.1	13
1.30	26	20	---	5	---	---	4	15-35	0.1	13
1.40	26	20	---	5	---	---	4	15-35	0.1	13

Tige d'expansion / Expansion pins / Aufweitstifte

PEMAMO 814	MVR 060	Ø	%
814-028	825-028	Ø 0.60 - 0.70	8%
814-047	825-047	Ø 0.80 - 1.00	8%
814-058	825-058	Ø 1.10 - 1.40	8%

MVR 060

1.50	41	35	---	8	---	---	10	15-50	0.1	21
1.60	41	35	---	8	---	---	10	15-50	0.1	21
1.70	41	35	---	8	---	---	10	15-50	0.1	21
1.80	41	35	---	8	---	---	10	15-50	0.1	21
1.90	41	35	---	8	---	---	10	15-50	0.1	21
2.00	41	35	---	8	---	---	10	15-70	0.1	21
2.10	41	35	---	8	---	---	10	15-70	0.1	21
2.20	41	35	---	8	---	---	10	15-70	0.1	21
2.30	41	35	---	8	---	---	10	15-70	0.1	21
2.40	41	35	---	8	---	---	10	15-70	0.1	21
2.50	41	35	---	8	---	---	10	15-70	0.1	21
2.95	41	35	---	8	---	---	10	15-70	0.1	21

Tige d'expansion / Expansion pins / Aufweitstifte

MVR 060	Ø	%
825-090	Ø 1.50 - 1.90	2%
825-130	Ø 2.00 - 2.95	2%