



Rodoirs pour trous borgnes avec liant galvanique

Hones for blind bores with galvanic bond


Honahlen für Sacklochbohrungen mit Galvanischebindung

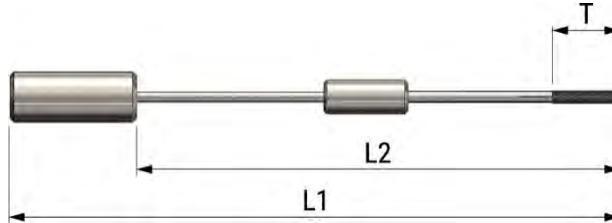

Ø	L1	L2	E	T	n	B	A	D	X	L _{max}
1.50	37	27	---	8	---	---	---	15 - 50	0.05	22
1.55	37	27	---	8	---	---	---	15 - 50	0.05	22
1.60	37	27	---	8	---	---	---	15 - 50	0.05	22
1.65	37	27	---	8	---	---	---	15 - 50	0.05	22
1.70	37	27	---	8	---	---	---	15 - 50	0.05	22
1.75	37	27	---	8	---	---	---	15 - 50	0.05	22
1.80	37	27	---	8	---	---	---	15 - 50	0.05	22
1.85	37	27	---	8	---	---	---	15 - 50	0.05	22
1.90	37	27	---	8	---	---	---	15 - 50	0.05	22
1.95	37	27	---	8	---	---	---	15 - 50	0.05	22



Rodoirs pour trous borgnes avec liant galvanique
Hones for blind bores with galvanic bond
 Honahlen für Sacklochbohrungen mit Galvanischebindung

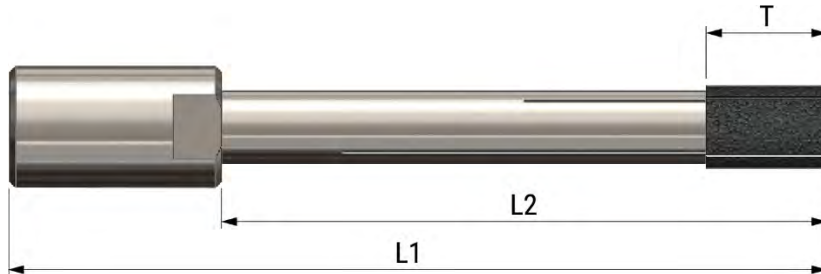

∅	L1	L2	E	T	n	B	A	D	X	L _{max}
2.00	50	40	---	11	---	---	---	15 - 70	0.05	35
2.50	50	40	---	11	---	---	---	15 - 70	0.05	35
3.00	50	40	---	11	---	---	---	15 - 70	0.05	35
3.50	50	40	---	11	---	---	---	15 - 70	0.05	35
4.00	55	45	---	11	---	---	---	15 - 70	0.05	40
4.50	55	45	---	11	---	---	---	15 - 70	0.05	40
5.00	70	55	---	11	---	---	---	15 - 150	0.05	50
6.00	75	60	---	11	---	---	---	15 - 150	0.05	55
7.00	75	60	---	11	---	---	---	15 - 150	0.05	55
8.00	80	65	---	11	---	---	---	15 - 150	0.05	60
9.00	80	65	---	11	---	---	---	15 - 150	0.05	60
10.00	85	70	---	16	---	---	---	15 - 150	0.05	65
11.00	110	75	---	16	---	---	---	15 - 150	0.05	70
12.00	110	75	---	16	---	---	---	15 - 150	0.05	70
13.00	110	75	---	16	---	---	---	15 - 150	0.05	70
14.00	110	75	---	21	---	---	---	15 - 150	0.05	70
15.00	115	80	---	21	---	---	---	15 - 150	0.05	75
16.00	115	80	---	21	---	---	---	15 - 150	0.05	75
17.00	115	80	---	21	---	---	---	15 - 150	0.05	75
18.00	120	85	---	21	---	---	---	15 - 150	0.05	80
19.00	120	85	---	21	---	---	---	15 - 150	0.05	80
20.00	120	85	---	21	---	---	---	15 - 150	0.05	80

