


Rodoirs avec liant métallique, uniquement pour la machine MVR 060
Hones with bronze bond, only for the MVR 060 machine
 Honahlen mit Bronzebindung, nur für die Maschine MVR 060

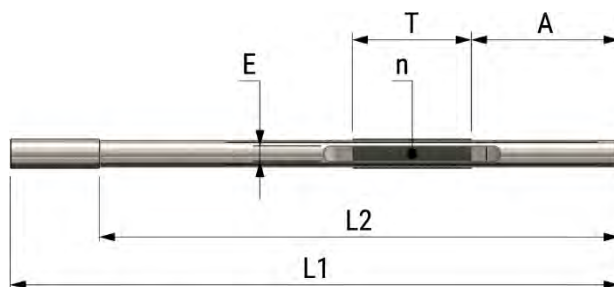

MVR 060

Ø	L1	L2	E	T	n	B	A	D	X	L _{max}
2.00	41	35	1	8	3	---	10	7 - 150	0.1	21
2.10	41	35	1	8	3	---	10	7 - 150	0.1	21
2.20	41	35	1	8	3	---	10	7 - 150	0.1	21
2.30	41	35	1	8	3	---	10	7 - 150	0.1	21
2.40	41	35	1	8	3	---	10	7 - 150	0.1	21
2.50	41	35	1	8	3	---	10	7 - 150	0.1	21
2.60	41	35	1	8	3	---	10	7 - 150	0.1	21
2.70	41	35	1	8	3	---	10	7 - 150	0.1	21
2.80	41	35	1	8	3	---	10	7 - 150	0.1	21
2.90	41	35	1	8	3	---	10	7 - 150	0.1	21
2.95	41	35	1	8	3	---	10	7 - 150	0.1	21

Tige d'expansion / Expansion pins / Aufweitstifte



MVR 060

825-130

Ø 2.00 - 2.95

2%

846

Ø 2.00 - 2.95

